




◆ Rear Panel

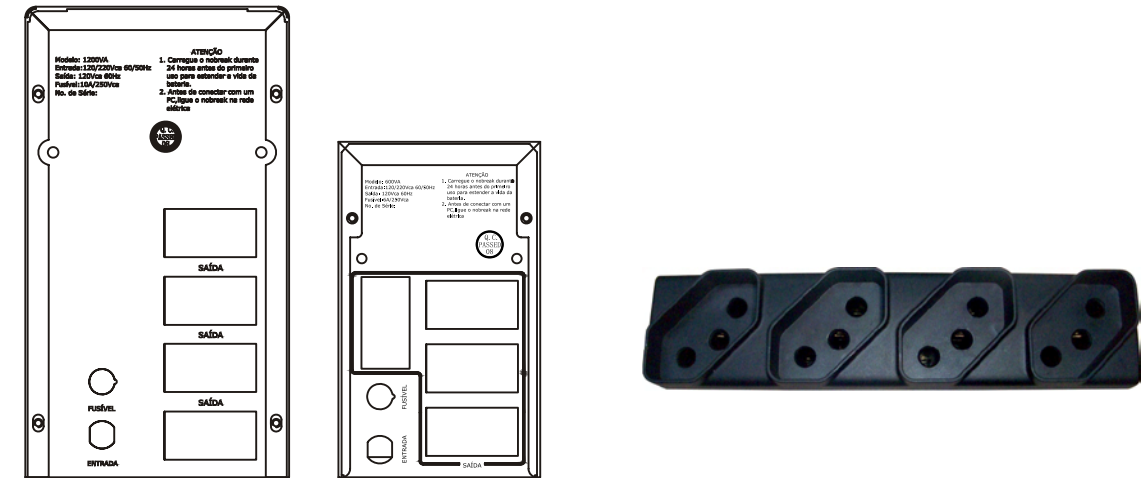

NO BREAK BX Series LED/LCD

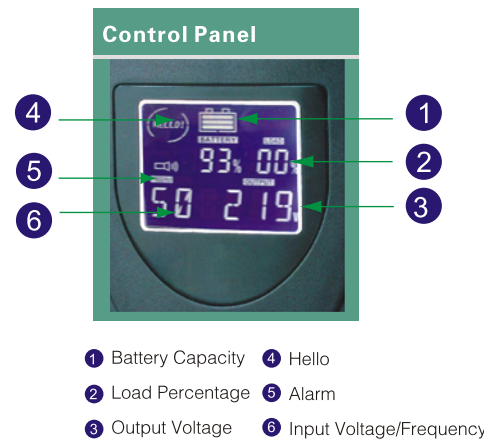

- 1 Battery Capacity
- 2 Load Percentage
- 3 Output Voltage
- 4 Hello
- 5 Alarm
- 6 Input Voltage/Frequency

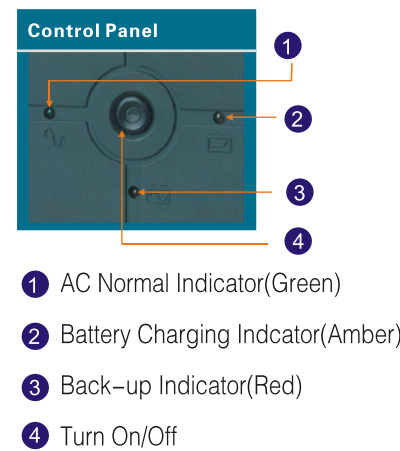

- 1 AC Normal Indicator(Green)
- 2 Battery Charging Indicator(Amber)
- 3 Back-up Indicator(Red)
- 4 Turn On/Off

- Fully AVR
- Surge protection
- Cold start available
- Self-detection on startup
- Intelligent CPU Controlled
- Automatic battery charging in UPS off mode
- Many front panels and colors for your choice
- Full protection against over voltage /low voltage
- Strong generator compatibility, compatible with any brand generators
- With strong electromagnetism compatibility, no electromagnetic interference to load
- Input with two standard 120V (90V-148V) and 220V(166V-276V) automatically
- Out put voltage can be fixed at 120V/220V/60HZ or adjustable for 120V/ 220V/60HZ at side
- Software communication optional with RS232 /USB/SNMP card; and RJ11/RJ45 also available

Specifications

Model	BX600	BX800	BX1200
VA Rating	600VA	800VA	1200VA
Real Power Rating	360W	480W	720W
Input			
Phase	Single Phase +N		
Voltage	120V (90V-148V) / 220V(166V-276V) Bivolt Automatico		
Frequency	60Hz ± 10%		
Output			
Voltage	120/220V ± 10%		
Waveform	Sine Wave(Mains); Modified Sine Wave(Battery)		
Frequency	60Hz ± 1% (Battery)		
Crest Factor	3:1		
Transfer	≤ 10 ms		
Socket	Max 4 pcs output socket	Max 4 pcs output socket	Max 6 pcs output socket
Battery			
Model	Lead-Acid Maintenance-Free Battery		
Cofiguration	1 × 12V/7AH	1 × 12V/8AH	2 × 12V/7AH
Recharge	90% Capacity after 8 hours , charge current 1.0A ± 0.2A		
Backup	10 ~20 Minutes, Depending on Load and Model		
Others			
Transformer	E Transformer		
Surge	RJ11 & RJ45 for Modem and LAN, Cable Attached (Optional)		
Communication	RS232 or USB or SNMP card (optional)		
Noise	<45db (1 Meter)		
Temperature	0~40°C		
Humidity	20~90%(Non-condensing)		
Net/Gross weight(Kg)	6.3/6.8	6.8/7.3	11.0/11.5
Dimension	340Dx95Wx165H(mm)		400Dx125Wx220H(mm)
Packing Dimension	375Dx145Wx230H(mm)		450Dx180Wx295H(mm)
Quantity / 20ft	2000PCS		1000PCS

◆ All specifications subject to change without notice.
◆ Custom-made specifications are acceptable.